






Unit 2 Clonroadmore Business Park
Quin Road
Co. Clare
Ireland
V95 W63A

ALUMINIUM TILE TRIMS

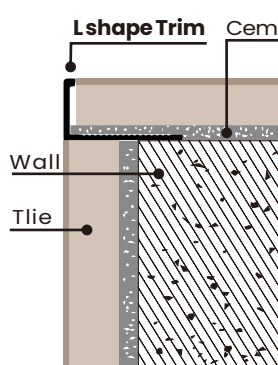

Code	H(mm)	T	W1	W2
W-BZ-04	8.2	1	20	1.98
W-BZ-05	10.2	1	20	1.98
W-BZ-06	12.5	1	23	1.98

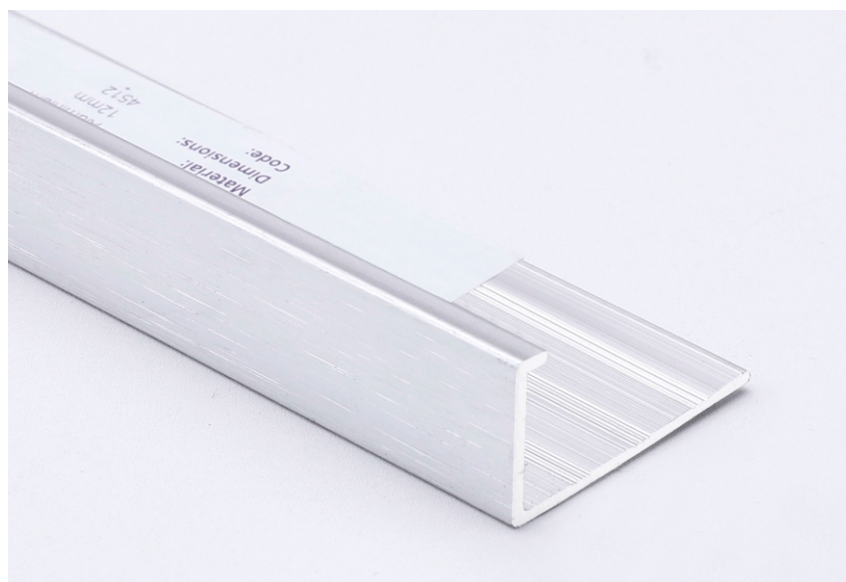

Chrome



Brushed Chrome




Polished Gold



Brushed Gold




Sandstone



Anthracite



Matt White



Brushed Black

Technical Specifications

Item	Specification
Material	High-grade Aluminium Alloy 6063 T6 (Excellent for anodising and finishing)
Profiles	Straight Edge (L-Shape)
Standard Length	2.5 meters
Finishes/Colors	Chrome, Brushed Chrome, Brushed Gold, Polished Gold, Matt White, Brushed Black, Sandstone, Antracite
Height (Leg Length)	8mm, 10mm, 12.5mm (To suit most common tile thicknesses)
Packaging	Protective cartons, typically 50 or 100 pieces per pack (customizable)

PRODUCT DATA SHEET

Product Overview

Our Aluminium Tile Trims are designed to provide a perfect, professional finish to tiled edges. Manufactured from high-grade aluminium alloy, they protect tile edges from chipping and wear while creating a clean, modern transition between surfaces. Ideal for both residential and commercial applications, these trims enhance durability and aesthetic appeal.

Key Features & Benefits

Robust Protection: Shields vulnerable tile edges from damage.

Premium Finish: Creates straight, precise lines for a sleek appearance.

Corrosion Resistant: Anodised and coated finishes ensure long-lasting performance, suitable for wet areas.

Easy Installation: Simple to cut and fit during the tiling process.

Versatile Design: Complements a wide range of tile styles and interior designs.

Application Areas

Walls & Floors: Bathrooms, kitchens, shower areas.

Commercial Spaces: Hotels, retail stores, office buildings.

Feature Edges: Steps, countertops, and pool surrounds.

Installation Guide

1) Measure & Cut: Determine required length. Cut the trim easily using a fine-toothed hacksaw or mitre saw.

2) Dry Fit: Place the trim in position before applying adhesive to ensure a perfect fit.

3) Apply Adhesive: Fix the trim securely using a suitable tile adhesive or silicone during the tiling process.

4) Tile & Grout: Lay tiles, allowing them to butt against the trim. Apply grout as normal once adhesive is set.

Ordering Information

For pricing, samples, or to discuss custom lengths and color matching, please contact our sales team. We are ready to support your project requirements.